

NEPTUNE-3 Wall Sconce

PRODUCT ORDERING CODE



PRODUCT FEATURES

- 4" Ø frosted or clear glass globes
- CREE COB CRI 90+ available in 2700K | 3000K | 3500K | 4000K
- Magnetic canopy with no apparent fastener
- Customizable sizes, finishes and LED specifications
- 5 year product warranty on LED products
- Rated for damp location



Project

Type

Quantity

Note

PRODUCT CODE	LIGHT SOURCE	GLASS
NPT Neptune-3 Wall Sconce - 25" H X 12" W X 6" P	COB8W27K90 8W LED 2700K CRI 90+ 907 nominal lumens COB8W30K90 8W LED 3000K CRI 90+ 963 nominal lumens COB8W35K90 8W LED 3500K CRI 90+ 1010 nominal lumens COB8W40K90 8W LED 4000K CRI 90+ 1050 nominal lumens	CFG Frosted glass CPG Clear glass


DIMMING	VOLTAGE	FINISH
D010 0-10V 1% dimming LED driver (4 wire) PHS Forward/Reverse Phase 1% LED dimming driver (2 wire) <i>(only available in 120V)</i> NODIM No dimming option required	120V/277V 120V-277V Universal voltage electronic LED driver 120V Electronic LED driver (PHS Phase dimming)	01 White paint 02 Black paint 08 Dark mat bronze paint 12 Antique gold paint 21 Polished gold plated 22 Brushed gold plated 24 Brushed nickel plated 31 Polished nickel plated 33 Black polished nickel plated

CUSTOM MODIFICATIONS

- Emergency battery pack available
- Dali control protocol or Lutron EcoSystem/3-wire dimming LED driver
- Custom sizes, configuration, finishes and lamping
- Remote driver

NEPTUNE-3 Wall Sconce

PRODUCT SPECIFICATION

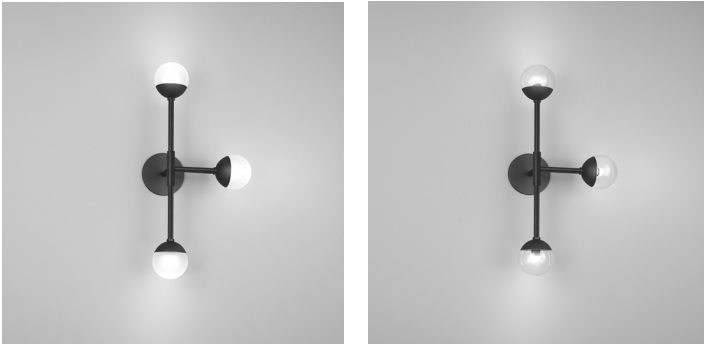

DIMENSIONS & WEIGHT

NPT H: 25" W: 12" P: 6" Net Wt. 4 lbs.

OTHER SPECIFICATIONS

- Center of electrical junction box to top of fixture 12.375"
- Standard 5/8" Ø steel tube structure
- Standard canopy size is 5" Ø x 0.25" H
- UL Certified and suitable for damp location


INSTALLATION REQUIREMENTS

- Driver to be fitted in junction box (except for remote options)
- Mounts to a standard 4" octagonal electrical junction box or plaster ring
- Wall mounts horizontally or vertically

LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- COB CREE LED: consistent binning that falls within 2 MacAdam ellipse
- COB Life, L70 > 61 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant

TECHNICAL DRAWING(S)

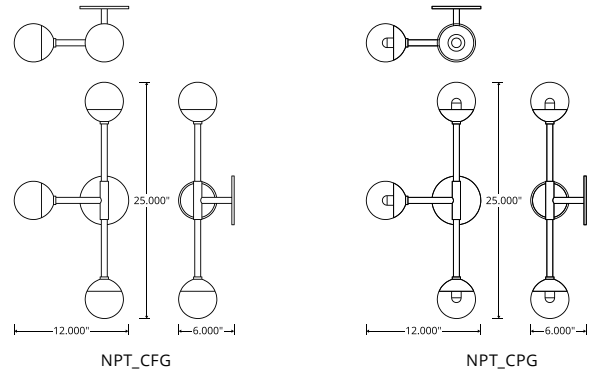

COMPATIBLE DIMMER LIST


Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming

NEPTUNE-3 Wall Sconce

PRODUCT SPECIFICATION

PHOTOMETRIC DATA

COB8W30K90 (CFG)
Nominal LED Source Wattage: 8W
System wattage: 10.0W
Color accuracy: CRI 90+
Light Color: 3000° K
Delivered lumens: 595 lm
Luminaire efficacy: 59.1 lm/w



COLOR TEMP. MULTIPLIER	
2700K	0.95
3000K	1.00
3500K	1.05
4000K	1.09