


NEPTUNE Wall Sconce

PRODUCT ORDERING CODE



PRODUCT FEATURES

- 4" Ø frosted or clear glass globes
- CREE COB CRI 90+ available in 2700K | 3000K | 3500K | 4000K
- Magnetic canopy with no apparent fastener offered in 2 size options
- Customizable finishes and LED specifications
- 5 year product warranty on LED products
- Rated for damp location

Project

Type

Quantity

Note



PRODUCT CODE		LIGHT SOURCE		GLASS	
NPW	Neptune Wall Sconce	COB3W27K90	3W LED 2700K CRI 90+ 308 nominal lumens	CFG	Frosted glass
		COB3W30K90	3W LED 3000K CRI 90+ 326 nominal lumens	CPG	Clear glass
		COB3W35K90	3W LED 3500K CRI 90+ 342 nominal lumens		
		COB3W40K90	3W LED 4000K CRI 90+ 356 nominal lumens		

CANOPY / REMOTE DRIVER		DIMMING		VOLTAGE		FINISH	
CM	5" Ø magnetic canopy (driver in junction box)	D010	0-10V 1% dimming LED driver (4 wire)	120V/277V	120V-277V Universal voltage electronic LED driver	01	White paint
REM-MCC	Remote driver with micro 2" Ø canopy	PHS	Forward/Reverse Phase 1% LED dimming driver (2 wire) (only available in 120V)	120V	Electronic LED driver (PHS Phase dimming)	02	Black paint
REM-CM	Remote driver with 5" Ø magnetic canopy	NODIM	No dimming option required			08	Dark mat bronze paint
 REMOTE DRIVER OPTION Remote driver option requires a seperate remote box. Referes to REM spec sheet.						12	Antique gold paint
						21	Polished gold plated
						22	Brushed gold plated
						24	Brushed nickel plated
						31	Polished nickel plated
						33	Black polished nickel plated

CUSTOM MODIFICATIONS

- Customizable finishes, sizes and LED specifications

NEPTUNE Wall Sconce

PRODUCT SPECIFICATION



DIMENSIONS & WEIGHT

NPW_CM H: 5" W: 5" P: 5.5" Net Wt. 2 lbs.
NPW_MCC H: 4" W: 4" P: 5.5" Net Wt. 2 lbs.

OTHER SPECIFICATIONS

- Standard canopy size is 5" Ø x 0.25" H (except for REM-MCC)
- Canopy size for REM-MCC option is 2" Ø x 0.25" H
- UL Certified and suitable for damp location


INSTALLATION REQUIREMENTS

- Driver to be fitted in junction box (except for remote options)
- Mounts to a standard 4" octagonal electrical junction box or plaster ring (except for remote options)
- REM-MCC canopy option requires a 1.375" Ø hole, ceiling thickness up to 1"

LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- COB CREE LED: consistent binning that falls within 2 MacAdam ellipse
- COB Life, L70 > 61 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant

TECHNICAL DRAWING(S)

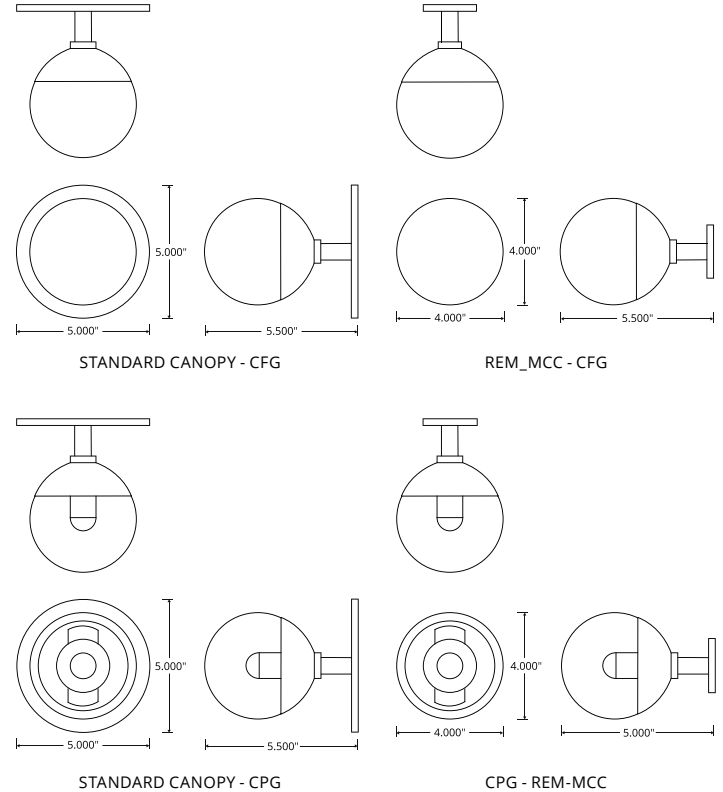

COMPATIBLE DIMMER LIST

Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming


NEPTUNE Wall Sconce

PRODUCT SPECIFICATION

PHOTOMETRIC DATA


COB3W9035K (CFG)

Nominal LED Source Wattage: 3W
System wattage: 3.5W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 241 lm
Luminaire efficacy: 68.7 lm/w

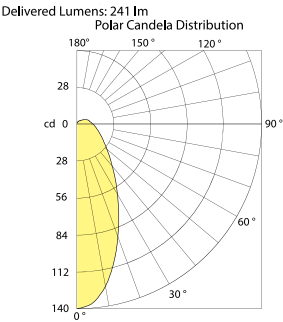

COB3W9035K (CPG)

Nominal LED Source Wattage: 3W
System wattage: 3.5W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 245 lm
Luminaire efficacy: 69.8 lm/w

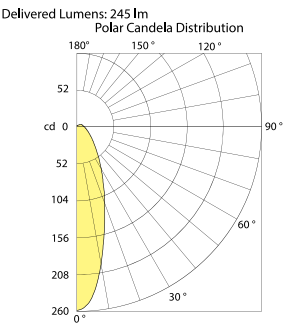

COLOR TEMP. MULTIPLIER

2700K	0.90
3000K	0.95
3500K	1.00
4000K	1.04