

STIXX MACRO Projector

PRODUCT ORDERING CODE



PRODUCT FEATURES

- Solid 2" Ø X 6" aluminum head offering performance and versatility
- Multi-directional head 355° / 90°
- CREE COB available in 80CRI | 90CRI | 95CRI with reflectors 26° | 60°
- CREE COB available in 2700K | 3000K | 3500K | 4000K
- Magnetic canopy with no apparent fastener offered in 2 size options
- 5 year product warranty on LED products
- Rated for damp location



Project	
Type	
Quantity	
Note	

PRODUCT CODE	LIGHT SOURCE	OPTIC	CANOPY & REMOTE DRIVER
SAP Stixx Macro Projector H: 8.25" W: 2"	COB9W27K80 9W LED 2700K CRI 80+, 1213 nominal lumens COB9W27K90 9W LED 2700K CRI 90+, 1025 nominal lumens COB9W27K95 9W LED 2700K CRI 95+, 889 nominal lumens	26M 26° angle reflector 60M 60° angle reflector	CM 5" Ø magnetic canopy (driver in junction box)
	COB9W30K80 9W LED 3000K CRI 80+, 1263 nominal lumens COB9W30K90 9W LED 3000K CRI 90+, 1087 nominal lumens COB9W30K95 9W LED 3000K CRI 95+, 943 nominal lumens		REM-CM Remote driver option with 5" Ø magnetic canopy (remote driver to be ordered separately)
	COB9W35K80 9W LED 3500K CRI 80+, 1304 nominal lumens COB9W35K90 9W LED 3500K CRI 90+, 1141 nominal lumens COB9W35K95 9W LED 3500K CRI 95+, 980 nominal lumens		REM-MCC Remote driver option with micro 2" Ø canopy
	COB9W40K80 9W LED 4000K CRI 80+, 1344 nominal lumens COB9W40K90 9W LED 4000K CRI 90+, 1187 nominal lumens COB9W40K95 9W LED 4000K CRI 95+, 1018 nominal lumens		1 REMOTE DRIVER OPTION <i>Remote driver option requires a separate remote box. Referes to REM spec sheet for ordering details.</i>


DIMMING	VOLTAGE	FINISH
D010 0-10V 1% dimming LED driver (4 wire) PHS Forward/Reverse Phase 1% LED dimming driver (2 wire) (only available in 120V) NODIM No dimming option required	120V/277V 120V-277V Universal voltage electronic LED driver 120V Electronic LED driver (PHS Phase dimming)	01 White paint 02 Black paint 08 Dark mat bronze paint 12 Antique gold paint 21 Polished gold plated 22 Brushed gold plated 24 Brushed nickel plated 31 Polished nickel plated

CUSTOM MODIFICATIONS


- Sloped ceiling adapter
- Customizable finishes, sizes and LED specifications
- Morre driver options

STIXX MACRO Projector

PRODUCT SPECIFICATION

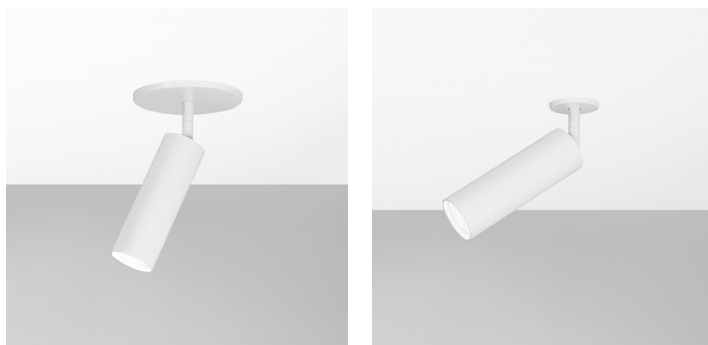

TECHNICAL DRAWING(S)

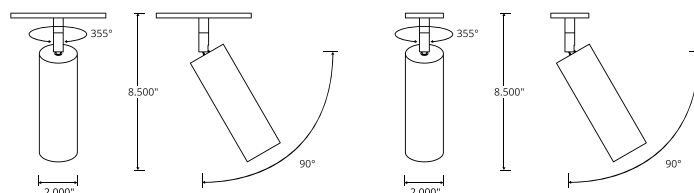

STANDARD CANOPY

REM-MCC

DIMENSIONS & WEIGHT

SAP H: 8.25" W: 2" Net Wt. 3 lbs.

OTHER SPECIFICATIONS

- Standard canopy size is 5" Ø x 0.25" H (except for REM-MCC)
- Canopy size for REM-MCC option is 2" Ø x 0.25" H
- Standard swivel 0.5" Ø X 2.165"
- UL Certified and suitable for damp location

INSTALLATION REQUIREMENTS

- Driver to be fitted in junction box (except for remote options)
- Mounts to a standard 4" octagonal electrical junction box or plaster ring (except for remote options)
- REM-MCC canopy option requires a 1.375" Ø hole, ceiling thickness up to 1"

LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- COB CREE LED: consistent binning that falls within 2 MacAdam ellipse
- COB Life, L70 > 61 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant

COMPATIBLE DIMMER LIST

Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming


STIXX MACRO Projector

PRODUCT SPECIFICATION

PHOTOMETRIC DATA


COB9W35K90 (26)

Nominal LED Source Wattage: 9W
System wattage: 10.2W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 822.1 lm
Luminaire efficacy: 80.1 lm/w



COB9W35K90 (60)

Nominal LED Source Wattage: 9W
System wattage: 10.2W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 824.9 lm
Luminaire efficacy: 80.2 lm/w



COLOR TEMP. MULTIPLIER

CCT	80CRI	90CRI	95CRI
2700K	1.06	0.90	0.78
3000K	1.11	0.95	0.83
3500K	1.14	1.00	0.86
4000K	1.17	1.04	0.89