

STIXX MACRO Chandelier

PRODUCT ORDERING CODE



PRODUCT FEATURES

- Solid 2" Ø aluminum cylinders offering performance and versatility
- Aluminum cylinder heads are available in 3 standard sizes
- CREE COB CRI 90+ available in 2700K | 3000K | 3500K | 4000K
- Cord option is available in various colours
- Available with reflectors 26° | 60°
- Chandelier available with standard sizes and multiple head configurations
- Head heights are adjustable
- Customizable canopy and fixture head configurations
- 5 year product warranty on LED products
- Rated for damp location



Project	
Type	
Quantity	
Note	

PRODUCT CODE	LIGHT SOURCE	CANOPY	OPTIC
SAR3SM 3 heads - Small cylinder (9") SAR3MD 3 heads - Medium cylinder (22") SAR3LG 3 heads - Long cylinder (36") SAR4SM 4 heads - Small cylinder (9") SAR4MD 4 heads - Medium cylinder (22") SAR4LG 4 heads - Long cylinder (36") SAR5SM 5 heads - Small cylinder (9") SAR5MD 5 heads - Medium cylinder (22") SAR5LG 5 heads - Long cylinder (36") SAR7SM 7 heads - Small cylinder (9") SAR7MD 7 heads - Medium cylinder (22") SAR7LG 7 heads - Long cylinder (36") SAR9SM 9 heads - Small cylinder (9") SAR9MD 9 heads - Medium cylinder (22") SAR9LG 9 heads - Long cylinder (36")	COB9027K Per head: 12W LED 2700K CRI 90+ 1380 nominal lumens COB9030K Per head: 12W LED 3000K CRI 90+ 1463 nominal lumens COB9035K Per head: 12W LED 3500K CRI 90+ 1536 nominal lumens COB9040K Per head: 12W LED 4000K CRI 90+ 1597 nominal lumens	C12 Round canopy 12" Ø x 1.5" H <i>Compatible with SAR3</i> C18 Round canopy 18" Ø x 2" H <i>Compatible with SAR5, SAR7 or SAR9</i> S12 Square canopy 12" x 12" x 1.5" <i>Compatible with SAR4 or SAR5</i>	ADM No reflector: Frosted polycarbonate diffusing lens 26M 26° angle reflector 60M 60° angle reflector

CORD	DIMMING	VOLTAGE	FINISH
AGC Anthracite gray cord PWC Pearly white cord SBC Silky black cord SGC Satin gold cord	D010 0-10V 1% dimming LED driver (4 wires) PHS Forward/Reverse Phase 1% LED dimming driver (2 wire) <i>(only available in 120V)</i> NODIM No dimming option required	120V/277V 120V-277V Universal voltage electronic LED driver 120V Electronic LED driver (PHS Phase dimming)	01 White paint 02 Black paint 08 Dark mat bronze paint 12 Antique gold paint 31 Polished nickel plated

CUSTOM MODIFICATIONS

- Customizable head selection with MX option
- Reduced wattage and lumen options available
- More color cord options
- Longer cord available
- 48" stems instead of cords
- Dali control protocol or Lutron EcoSystem/3-wire dimming LED driver
- Emergency battery pack available
- Remote driver

STIXX MACRO Chandelier

PRODUCT SPECIFICATION



DIMENSIONS & WEIGHT

- SAR3_C12** H: 59" to 86" W: 12" Ø Net Wt. 7 to 16 lbs.
- SAR5_C18** H: 59" to 86" W: 18" Ø Net Wt. 20 to 29 lbs.
- SAR7_C18** H: 59" to 86" W: 18" Ø Net Wt. 24 to 37 lbs.
- SAR9_C18** H: 59" to 86" W: 18" Ø Net Wt. 28 to 44 lbs.
- SAR4_S12** H: 59" to 86" W (A): 12" W (B): 12" Net Wt. 16 to 23 lbs.
- SAR5_S12** H: 59" to 86" W (A): 12" W (B): 12" Net Wt. 17 to 27 lbs.

OTHER SPECIFICATIONS

- Standard 72" long color cords are field adjustable (AGC, PWC, SBC, SGC)
- C12 includes a painted mounting canopy 10" Ø x 1.5"
- C18 includes a painted mounting canopy 16" Ø x 2"
- S12 includes a painted mounting canopy 10.5" x 10.5" x 1.5"
- Overall heights (SM = 83") - (MD = 96") - (LG = 110")
- UL Certified and suitable for damp location


INSTALLATION REQUIREMENTS

- Driver(s) concealed within canopy
- Mounts to a standard 4" octagonal electrical junction box or plaster ring


LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- COB CREE LED: consistent binning that falls within 2 MacAdam ellipse
- COB Life, L70 > 61 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant


TECHNICAL DRAWING(S)

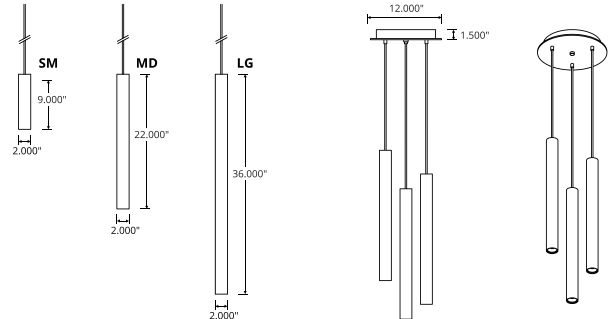


CYLINDER SIZES

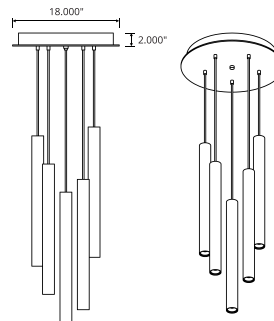


SAR5_C18

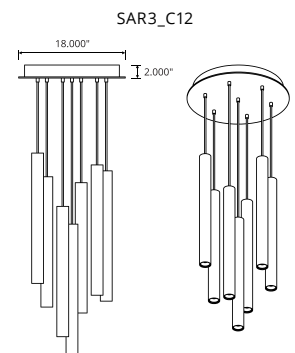


SAR7_C18



SAR9_C18



SAR4_S12



SAR5_S12

COMPATIBLE DIMMER LIST

Compatibility dimmer list available on our website:
www.hemeraighting.com/dimming


STIXX MACRO Chandelier

PRODUCT SPECIFICATION

PHOTOMETRIC DATA


COB16W9035K 26M (PER HEAD)

Nominal LED Source Wattage: 16W
System wattage: 18.2W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 1327.6 lm
Luminaire efficacy: 78.1 lm/w




COB16W9035K 60M (PER HEAD)

Nominal LED Source Wattage: 16W
System wattage: 18.2W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 1332.3 lm
Luminaire efficacy: 73.1 lm/w

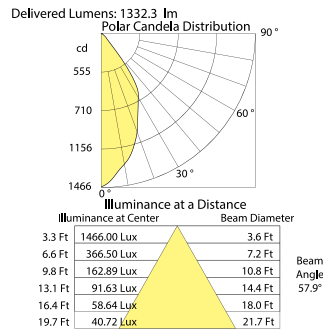

COB16W9035K ADM (PER HEAD)

Nominal LED Source Wattage: 16W
System wattage: 18.2W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 730.8 lm
Luminaire efficacy: 40.2 lm/w

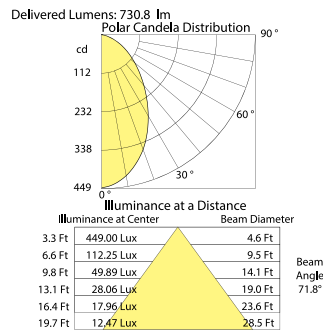

CUSTOM CHANDELIERS

Elevate your space with a chandelier crafted exclusively for you. From bespoke canopy dimensions to impeccably tailored cable lengths and sculptural 3D forms, we design luminous installations that transform your project into a statement of sophistication.



COLOR TEMP. MULTIPLIER

2700K	0.90
3000K	0.95
3500K	1.00
4000K	1.04