

SOLSTICE Wall Sconce

PRODUCT ORDERING CODE



PRODUCT FEATURES

- An elongated high performance wall sconce inspired by modern architecture offering a slim sophisticated form
- White frosted acrylic diffuser
- Nichia LED engine CRI 90+ available in 2700K | 3000K | 3500K
- Multiple painted finishes
- Can be installed horizontally or vertically
- ADA, LED
- 5 year product warranty on LED products
- Rated for damp location



Project	
Type	
Quantity	
Note	

PRODUCT CODE		LIGHT SOURCE	
SIWSM	Small Solstice Wall Sconce - 24" H X 2.75" W X 2" P	LED9W27K90	9W LED 2700K CRI 90+ 1300 nominal lumens for SIWSM
SIWLG	Large Solstice Wall Sconce - 42.5" H X 2.75" W X 2" P	LED9W30K90	9W LED 3000K CRI 90+ 1335 nominal lumens for SIWSM
		LED9W35K90	9W LED 3500K CRI 90+ 1345 nominal lumens for SIWSM
		LED13W27K90	13W LED 2700K CRI 90+ 2090 nominal lumens for SIWLG
		LED13W30K90	13W LED 3000K CRI 90+ 2140 nominal lumens for SIWLG
		LED13W35K90	13W LED 3500K CRI 90+ 2160 nominal lumens for SIWLG
		LED14W27K90	14W LED 2700K CRI 90+ 1920 nominal lumens for SIWSM
		LED14W30K90	14W LED 3000K CRI 90+ 1980 nominal lumens for SIWSM
		LED14W35K90	14W LED 3500K CRI 90+ 2020 nominal lumens for SIWSM
		LED20W27K90	20W LED 2700K CRI 90+ 3080 nominal lumens for SIWLG
		LED20W30K90	20W LED 3000K CRI 90+ 3170 nominal lumens for SIWLG
		LED20W35K90	20W LED 3500K CRI 90+ 3190 nominal lumens for SIWLG


DIMMING		VOLTAGE		FINISH	
D010	0-10V 1% dimming LED driver (4 wire)	120V/277V	120V-277V Universal voltage electronic LED driver	01	White paint
PHS	Forward/Reverse Phase 1% LED dimming driver (2 wire) <i>(only available in 120V)</i>	120V	Electronic LED driver (PHS Phase dimming)	02	Black paint
NODIM	No dimming option required			08	Dark mat bronze paint
				12	Antique gold paint

CUSTOM MODIFICATIONS


- Customizable finishes, sizes and LED specifications
- More driver and remote options

SOLSTICE Wall Sconce

PRODUCT SPECIFICATION

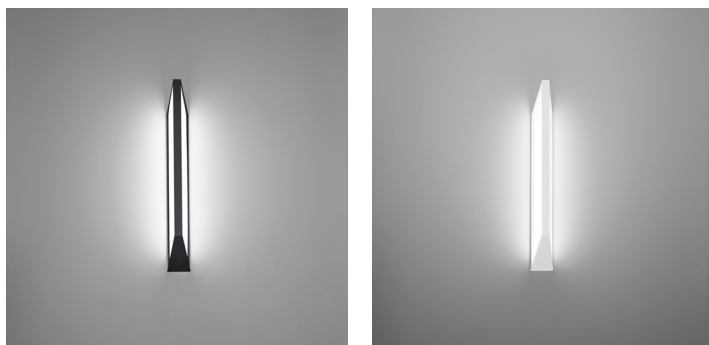

TECHNICAL DRAWING(S)

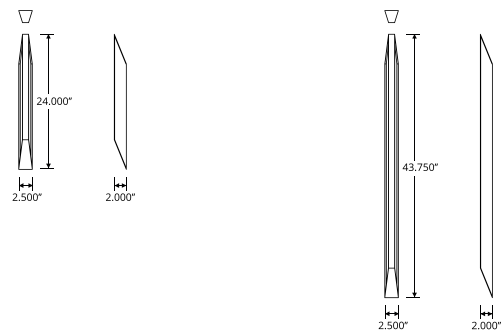

SIWSM

SIWLG

DIMENSIONS & WEIGHT

SIWSM H: 24" W: 2.75" P: 2" Net Wt. 4 lbs.
SIWLG H: 42.50" W: 2.75" P: 2" Net Wt. 6 lbs.

OTHER SPECIFICATIONS

- Painted metal structure
- Center of electrical junction box to top of fixture vertical mount (SIWSM = 12") - (SIWLG = 21.25")
- Center of electrical junction box to top of fixture horizontal mount (SIWSM = 1.375") - (SIWLG = 1.375")
- UL Certified and suitable for damp location

INSTALLATION REQUIREMENTS

- Backplate mounts to a switch box (min. switch box dimensions 2.25" W X 2.5" D)
- Driver to be fitted in junction box

LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- Consistent binning that falls within 3 MacAdam ellipse
- LED Life, L70 > 60 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- LED engine made in Canada
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant

COMPATIBLE DIMMER LIST

Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming

SOLSTICE Wall Sconce

PRODUCT SPECIFICATION

PHOTOMETRIC DATA

LED14W35K90
Nominal LED Source Wattage: 14W
System wattage: 17W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 1090 lm
Luminaire efficacy: 64.1 lm/w

Delivered Lumens: 1090 lm
Polar Candela Distribution

