


STIXX NANO Micro-Suspension

PRODUCT ORDERING CODE



PRODUCT FEATURES

- Metal cylinder 0.5" Ø
- LED engine CRI 90+ available in 2700K | 3000K | 3500K
- Product is offered in 3 standard sizes
- Chandelier available with multiple heads and customizable canopy in various shapes and sizes
- Fixture height is adjustable
- 5 year product warranty on LED products
- Rated for damp location



Project

Type

Quantity

Note

PRODUCT CODE	LIGHT SOURCE	CANOPY & REMOTE DRIVER
SNMSM Short Stixx Nano Suspension 0.5" Ø X 12" H Metal Cylinder SNMMD Medium Stixx Nano Suspension 0.5" Ø X 16" H Metal Cylinder SNMLG Long Stixx Nano Suspension 0.5" Ø X 20" H Metal Cylinder	COB2W27K90 2W LED 2700K CRI 90+ 310 nominal lumens COB2W30K90 2W LED 3000K CRI 90+ 320 nominal lumens COB2W35K90 2W LED 3500K CRI 90+ 330 nominal lumens	RCX Round Canopy 5" Ø X 0.625" REM-RCX Remote driver option with Round Canopy 5" Ø X 0.625" REM-MCX Remote driver option with micro 2" Ø canopy ⓘ REMOTE DRIVER OPTION Remote driver option requires a separate remote box. Refers to REM spec sheet for ordering details.


DIMMING	VOLTAGE	FINISH
D010 0-10V 1% dimming LED driver (4 wire) PHS Forward/Reverse Phase 1% LED dimming driver (2 wire) <i>(only available in 120V)</i> NODIM No dimming option required	120V/277V 120V-277V Universal voltage electronic LED driver 120V Electronic LED driver (PHS Phase dimming)	01 White paint 02 Black paint 08 Dark mat bronze paint 21 Polished gold plated 22 Brushed gold plated 24 Brushed nickel plated 31 Polished nickel plated

✂ CUSTOM MODIFICATIONS

- Longer cable available
- Custom sizes and finishes
- More driver options

STIXX NANO Micro-Suspension

PRODUCT SPECIFICATION

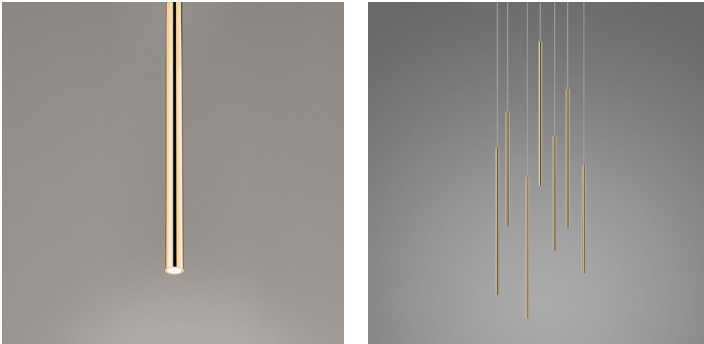

DIMENSIONS & WEIGHT

- SNMSM** H: 12" W: 0.5" Net Wt. 1 lb.
SNMMD H: 16" W: 0.5" Net Wt. 2 lbs.
SNMLG H: 20" W: 0.5" Net Wt. 4 lbs.

OTHER SPECIFICATIONS

- Dual conductor coated coaxial class 2 adjustable cable 3/32" Ø x 72"
- Standard canopy size is 5" Ø x 0.63" H (except for REM-MCX)
- Canopy size for REM-MCX option is 2" Ø x 0.25" H
- Overall heights for Standard canopy (SNMSM = 85") - (SNMMD = 89") - (SNMLG = 93")
- UL Certified and suitable for damp location


INSTALLATION REQUIREMENTS

- Driver to be fitted in junction box (except for remote options)
- Mounts to a standard 4" octagonal electrical junction box or plaster ring (except for remote options)
- For remote dimming LED driver options, contact factory for specifications and details
- REM-MCX canopy option requires a 1.375" Ø hole, ceiling thickness up to 1"

LIGHT SOURCE SPECIFICATIONS

- Electronic constant current LED power supply
- Consistent binning that falls within 3 MacAdam ellipse
- LED Life, L70 > 60 000 hrs at 70% lumen maintenance
- Integral Class II driver
- Thermally managed within manufacturer specifications to maximize LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric & materials
- Electrical components are mercury free and are RoHS compliant

TECHNICAL DRAWING(S)

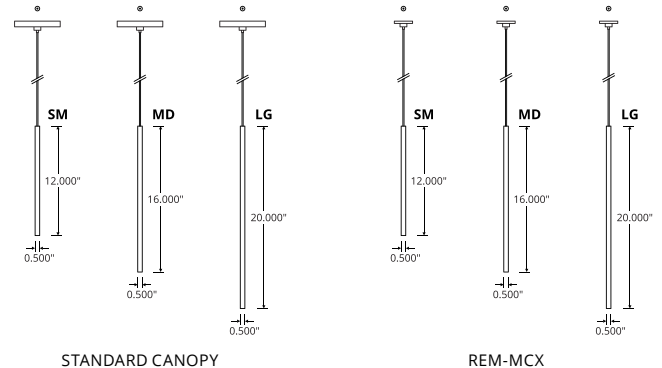

COMPATIBLE DIMMER LIST


Compatibility dimmer list available on our website:
www.hemeralighting.com/dimming

STIXX NANO Micro-Suspension

PRODUCT SPECIFICATION

PHOTOMETRIC DATA

LED2W35K90
Nominal LED Source Wattage: 2W
System wattage: 3.6W
Color accuracy: CRI 90+
Light Color: 3500° K
Delivered lumens: 69 lm
Luminaire efficacy: 18.6 lm/w

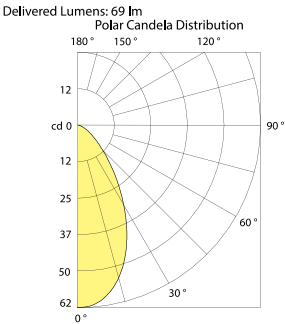

COLOR TEMP. MULTIPLIER	
2700K	0.92
3000K	0.95
3500K	1.00
4000K	1.04