

REM Remote Driver Box

PRODUCT ORDERING CODE



PRODUCT FEATURES

- 16 gauge steel.
- Pre-punched holes to accommodate screw-hinged cover.
- Easily removable knockouts on all sides.
- Mounting holes on back.
- Two grounding emboss & grounding screw.
- ANSI/ASA61 grey polyester - epoxy textured powder coating inside out
- CSA certified 150359 / UL listed E109311.
- Drivers are mounted inside the REM box upon delivery.
- 5 year product warranty on LED products
- Rated for damp location



Project	
Type	
Quantity	
Note	


PRODUCT CODE		LIGHT SOURCE	DIMMING
REM6	Remote Box 6" x 6" x 4" 1 or 2 drivers	1 1 driver per box (<i>REM6 or REM6ML only</i>)	D010 0-10V dimming.
REM12	Remote Box 12" x 12" x 4" 3 to 8 drivers	2 2 drivers per box	PHS Phase dimming (120V only) <i>Not compatible with REM-6ML or REM-12ML.</i>
REM6ML	Remote box 6" x 6" x 4" 1 driver for EOSMD or EOSLG only	3 3 drivers per box	NODIM No dimming
REM12ML	Remote box 12" x 12" x 4" 2 to 5 drivers for EOSMD or EOSLG only	4 4 drivers per box	
		5 5 drivers per box	
		6 6 drivers per box	
		7 7 drivers per box	
		8 8 drivers per box	

PRODUCT SPECIFICATION

DIMENSIONS & WEIGHT

REM6 / REM6ML W: 6" L: 6" H: 4.25" Net Wt. 4 lbs. (box only)
REM12 / REM12ML W: 12" L: 12" H: 4.25" Net Wt. 10 lbs. (box only)

TECHNICAL DRAWING(S)

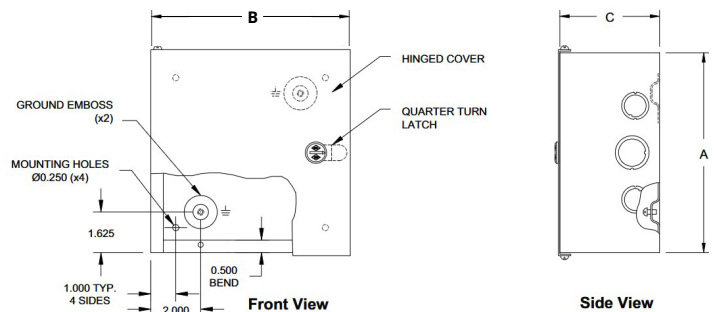

REM6 / REM6ML
REM12 / REM12ML

A	B	C
6.000 in	6.000 in	4.250 in
12.000 in	12.000 in	4.250 in